


## Instructions for RF 6630 16 Amp Receiver

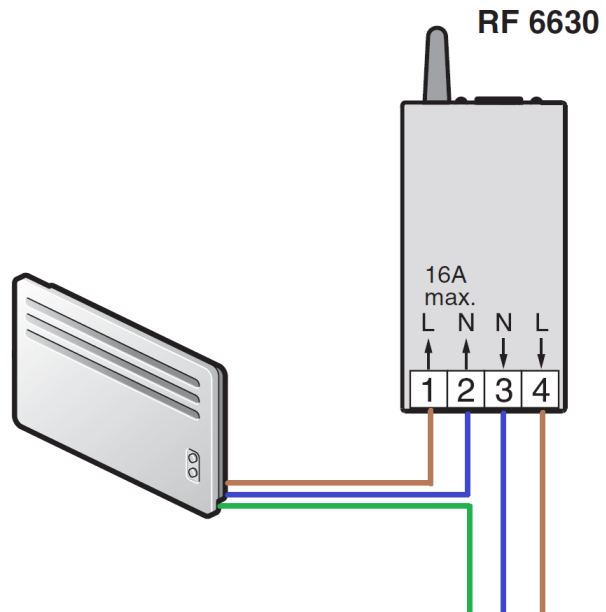


### X3D – X2D Mode

The receiver comes in the X3D mode which will work with the TYBOX 5101 and the TYDOM 1.0 straight away.

Follow the below steps to change the mode to X2D to pair it to the TYBOX 157

1. Turn the power on and count the number of flashes on the L2 LED light (furthest from the aerial) (3 flashes = X3D, 2 flashes = X2D)
2. Press the top button once and the mode will change, the flashes will indicate the change
3. Once the LED light is flashing twice (2 times), press and hold the button for 3 seconds to confirm the mode.
4. Now the L1 LED (closest to the aerial) will be flashing, indicating it is ready to pair.
5. The receiver is now ready to be paired to the TYBOX 157

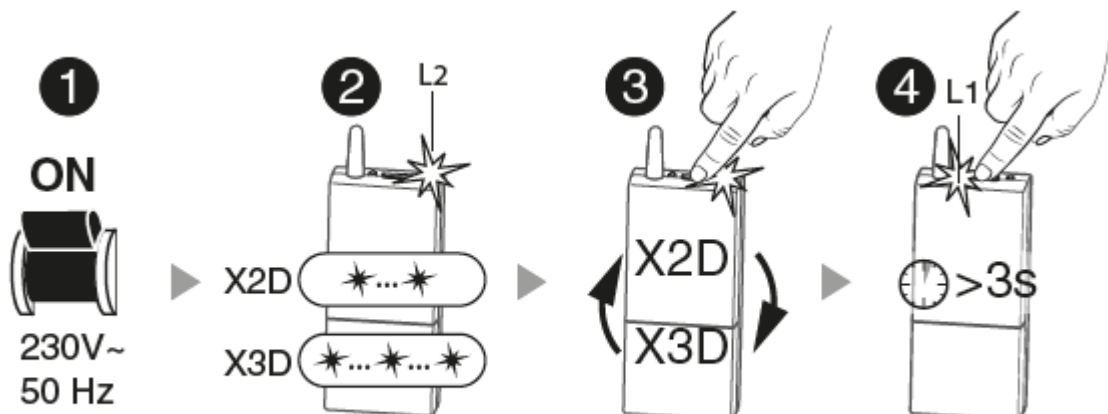

## Association with TYBOX 157

The receiver light will be flashing, ready to be paired to the TYBOX 157. (If it is not flashing, press and hold the button for 3 seconds until L1 starts to flash.

On the TYBOX 157 turn the dial to the power symbol, press the “i” button for 5 seconds until you enter the advanced menu. Then press the “R” button once to enter the association mode. Ensure the r-01 Menu is set to “0”

Press the “OK” button once to bring up the rAd1 menu, then the “i” button to begin the association. The LED Light on the receiver will stop flashing and products will be associated.

Turn the dial clockwise to exit the advanced menu.

